



LINKOUD02 DOUBLE DOOR DISPLAY CHILLER



LINKO Commercial Display Chiller - Inverter Series combines efficient cooling, clear product presentation and reliable daily operation. Inverter compressor technology helps reduce power consumption, while R290 refrigerant supports a lower environmental impact and quieter performance.

FEATURES

01

INVERTER ENERGY SAVING

Inverter compressor technology helps reduce power consumption and operating cost.

02

R290 REFRIGERANT

Environment-conscious refrigerant supports lower condenser heat and quieter operation.

03

HEATED TEMPERED GLASS

Heated glass helps reduce condensation and keeps the display clear.

04

BRIGHT LED LIGHTING

Integrated LED lighting provides a clean, bright view of displayed products.



BRIGHT. EFFICIENT. RELIABLE.

0-4°C

TEMPERATURE

R290

REFRIGERANT


220V / 50Hz

POWER SUPPLY

INVERTER DISPLAY SERIES

TECHNICAL OVERVIEW

LINKOUD02 DOUBLE DOOR DISPLAY CHILLER

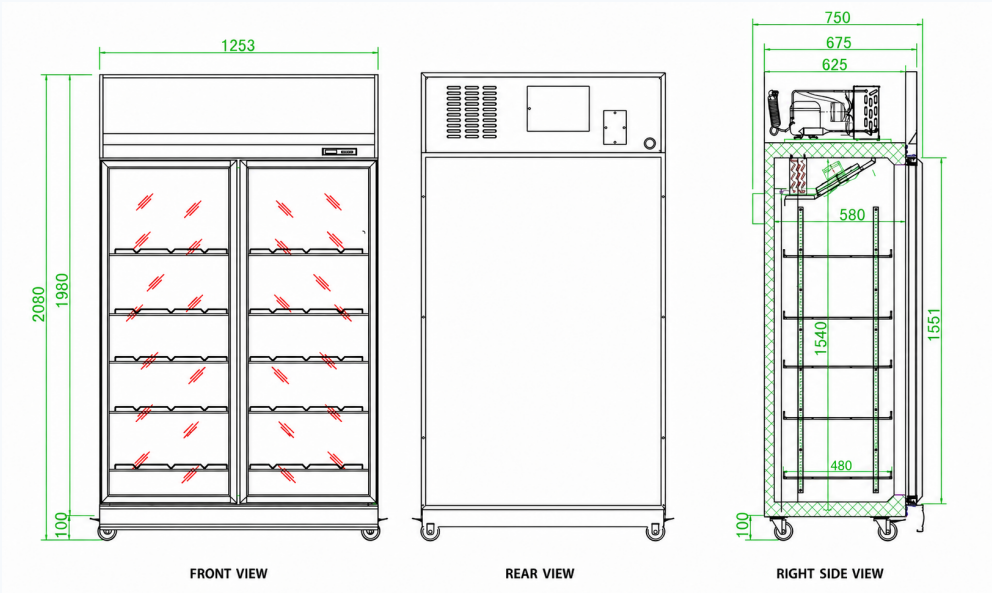

DIMENSION DRAWING - NOT TO SCALE



MODEL	LINKOUD02
PRODUCT	Double Door Display Chiller
DIMENSIONS (W x D x H)	1253 x 750 x 2080 mm
POWER SUPPLY	220V / 50Hz
POWER	480W
TEMPERATURE RANGE	0-4°C
CONDENSER TYPE	Copper
EVAPORATOR TYPE	Copper
COMPRESSOR BRAND	Embraco
COMPRESSOR MODEL	VENT406U
COMPRESSOR TYPE	Inverter
REFRIGERANT	R290
DOOR	Heated tempered glass
LIGHTING	LED



VENT406U
INVERTER COMPRESSOR

Specifications are subject to change without prior notice. Please confirm final production dimensions and operating data before ordering or installation.